

IES7110-2GS

8-port 10/100M Ethernet+ + 2-port Gigabit SFP slot

Managed Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W
- SW-Ring ring network patent technology (Fault recovery time<20ms)
- Support RSTP, way exchange time<50ms
- Support WEB configuration
- Support MAC address learning, aging automatic
- Support port status display, data update.
- Support static and dynamic IGMP
- Support flow statistics
- Support bi-directional port mirroring
- Support rate control, Broadcast storm control
- Support configuration file up and download
- Support 1 channel relay alarm output
- Industrial grade 4 design, -40~75°C work temperature
- No fan design
- IP40 protection grade



Introduction


IES7110-2GS is a industrial grade, managed and redundancy Ethernet switch. It provided some kinds of advanced network managed function, like as: SW-Ring redundancy ring network, VLAN, Trunking, Quality of Service, Speed control, port mirroring, fault alarm and firmware upgrade online. SW-Ring can bring your Ethernet to intelligent redundancy. Standard Industry design, can

satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage power supply input.

SW-Ring™ is designed as a rapid redundancy network arithmetic's. It provided recover technology for fault of rapid redundant network, the recovery time<20ms.

Dimension

Unit (mm)

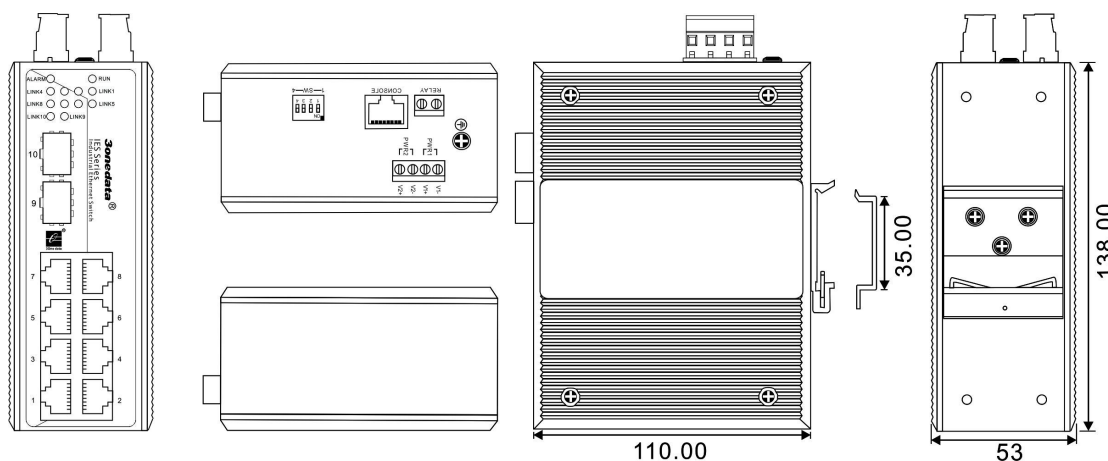

Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.3z, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W

Protocol: ARP, ICMP, TCP, UDP, DHCP, DNS, HTTP, Telnet, SW-Ring, RSTP, SNMP

Flow control: IEEE802.3x flow control, back press flow control

Function

Switch function: SW-Ring, QOS, 802.1QVLAN, RSTP, SNMP, Port trunking, static multicast filter, port mirroring, bandwidth management, broadcast storm control, port flow statistics, user name access system

SW-Ring: Support Single, Couple, Chain, Dual homing

Exchange attribute

100M forward speed: 148810pps

1000M forward speed: 1488100pps

Transmit mode: store and forward

System exchange bandwidth: 7.6G

MAC address table: 8K

Memory: 1M

Interface

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

1000M fiber port: 1000Base-X (SFP port)

Console port: debug serial port carry out CLI command

Alarm port: 2bit 7.62mm Terminal block

1 channel relay alarm output

Load ability: 1A@24VDC

Transfer distance:

Twisted cable: 100M (standard CAT5/CAT5e cable)

LED indicator:

Run indicator: Run

Interface indicator: Link (1~8/G1~G2)

Power supply indicator: PWR1, PWR2

Alarm indicator: Alarm

Power supply

Input voltage: 12~48VDC

Input method: 4 bits 7.62mm terminal block

Overload current protect: 4.0A

Support DC dual power supply alarm input

Support DC dual power supply redundancy

Support DC input no parity, protection reverse connection

Consumption

Unload consumption: 2.2W@24VDC

Full load consumption: 5.5W@24VDC

Working environment:

Working temperature: -40~75℃

Storage temperature: -40~85℃

Relative Humidity: 5%~95% (no condensation)

Mechanical Structure:

Shell: IP40 protect grade, metal shell

Installation: DIN rail and wall mount

Size (W×H×D: 138mm×53mm×110mm

Weight: 720g

Industry Standard:

CE, FCC, RoHS, PAL, UL508 (Pending)

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD) , Level 4

EN61000-4-3 (RS) , Level 3

EN61000-4-4 (EFT) , Level 4

EN61000-4-6 (CS) , Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Shake: IEC 60068-2-6

Warranty: 5 years

Packing List

1. Ethernet switch IES7110-2GS (plus terminal block) ×1
2. CD × 1
3. User manual × 1
4. Certificate of quality × 1
5. Warranty card × 1
6. DIN-Rail mounting kit × 1

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com