

PRODUCT DATA SHEET

RRC2054

RRC2054

Standard Battery Pack Li-Ion
 14.40V / $\geq 3.40\text{Ah}$ / $\geq 48.96\text{Wh}$

Distributed by:


www.texim-europe.com


Features

- Worldwide approvals and certification of safety standards
- No development costs, fast time-to-market
- Smart batteries with numerous features according to the SMBus specification
- Integrated LED State of Charge (SoC) indicator
- State-of-the-art lithium-ion cells with the market's highest energy density
- High discharge performance
- JEITA charging profile optimization
- Numerous and redundant safety features
- Battery Life Management: increased protection in case of cell ageing
- Increased ESD protection up to 8.00kV
- Up to 80% of initial capacity after 800 cycles

Applications

Suitable for use with tablet PC's, notebooks, industrial and medical devices, etc.

PRODUCT DATA SHEET

RRC2054

Characteristics

General	
Delivery status battery capacity	<30%
Compliance information	IEC 62133 / CE / UL2054 / CAN ICES-003(B) / NMB-003(B) / FCC / UKCA / PSE / KC / BSMI / GOST-R / CMIM / CQC / RCM / BIS / TISI / UN 38.3 / RoHS / REACH
Operating temperature	0°C to 45°C (charge) -20°C to 60°C (discharge)
Storage temperature	-20°C to 50°C max. -20°C to 25°C recommended
Communication interface	SMBus
P/N	1005680 Each battery has an individual serial number (S/N), which is located on the hardpack label for tracking & traceability.

Electrical Parameters	
Nominal voltage	14.40V
Nominal capacity	≥3.40Ah
Initial impedance	<180mΩ @ 1kHz at 25°C
Max. charge current	≥2.00A
Max. charge voltage	16.80V
Max. discharge current	5.00A

Battery Dimensions	
Length	85.10mm +0.25/-0.25
Width	77.40mm +0.25/-0.25
Thickness	22.40mm +0.60/-0.40
Weight	230g
Contacts	+, D, C, T, -
Ingress protection	IP40

Safety Features	
CUV (Cell Under Voltage)	Protection against deep discharge
COV (Cell Over Voltage)	Protection against over charge
OTC (Over Temperature in Charge)	Protection against overheating while charging
OTD (Over Temperature in Discharge)	Protection against overheating during discharging
OCC (Over Current in Charge)	Protection against overcurrent while charging
OCD (Over Current in Discharge)	Protection against overcurrent during discharging
OL (Overload in Discharge)	Protection against overload during discharging
SCC (Short Circuit in Charge)	Protection against short circuits while charging
SCD (Short Circuit in Discharge)	Protection against short circuits during discharging

PRODUCT DATA SHEET


RRC2054

Recommended Accessories

Type	Product	P/N	Application
Standard Battery Charger	 RRC-SMB-UBC RRC-SMB-UBC-M	100485 110105	60.00W standard battery charger for optimized charging process. With external power supply for worldwide use.
Standard Battery Charger	 RRC-SMB-MBC RRC-SMB-MBC-M	110017 110104	50.00W standard battery charger for optimized charging process. With external power supply for worldwide use.
Standard Battery Charger	 RRC-SMB-DBC	110111	Dual bay standard battery charger for optimized charging process. With external power supply for worldwide use.
Power Management Module	 RRC-PMM240	100576	Power management module for smart battery charging with automatic power source selection. Fits to all RRC20xx standard smart batteries.
Power Supply AC/DC	 PS65	210919	External power supply (worldwide use) for embedded battery charger RRC-PMM240 or for mobile devices. Included in RRC-SMB-UBC/MBC.
3-pol AC-Cable	 US-Version EU-Version UK-Version AU-Version CN-Version	210950 210951 211133 211134 211959	Country specific power cable for PS65.
Car Adapter DC/DC	 RRC-SMB-CAR	110041	90.00W car adapter with USB charging port. Power supplying in cars and trucks for RRC-SMB-UBC, RRC-SMB-MBC, RRC-PMM240 or mobile devices.

PRODUCT DATA SHEET

RRC2054

Type	Product	P/N	Application
Design-In Tool 	SMBus-Reader	100127	Simple read out of SMBus batteries data. No external power supply required. 5way blade connector and RS232 interface.
Battery Connector 	SMBus-Battery-Cable	400665	Extension cable for battery applications. Suitable for RRC204x and RRC205x batteries.
Battery Mating Connector 	RRC-MC20-90-10 RRC-MC20-180-10	210519 210518	Mating connector for standard smart batteries from RRC. Suitable for RRC20xx batteries. Available for 90° or 180° PCB mounting.



Germany/Headquarters

RRC power solutions GmbH
Technologiepark 1
66424 Homburg / Saar

Tel.: +49 6841 98090
Fax: +49 6841 9809280
Email: sales@rrc-ps.com
Web: www.rrc-ps.com

USA

RRC power solutions Inc.
18340 Yorba Linda Blvd.,
107-437
Yorba Linda, CA 92886

Tel.: +1 714 777 3604
Fax: +1 714 777 3658
Email: usa@rrc-ps.com
Web: www.rrc-ps.com

Hong Kong

RRC power solutions Ltd.
S-V,6/F, Valiant Industrial
Centre 2-12 Au Pui Wan Street
Fo Tan, N.T., Hong Kong

Tel.: +852 2376 0106
Fax: +852 2375 0107
Email: hkrcc@rrc-ps.cn
Web: www.rrc-ps.cn

China

RRC power solutions Ltd.
Room 1306, C Building,
Tianan International building,
Renmin South Road, Luohu
District, Shenzhen 518021

Tel.: +86 755 8374 1908
Fax: +86 755 8374 1861
Email: hkrcc@rrc-ps.cn
Web: www.rrc-ps.cn

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

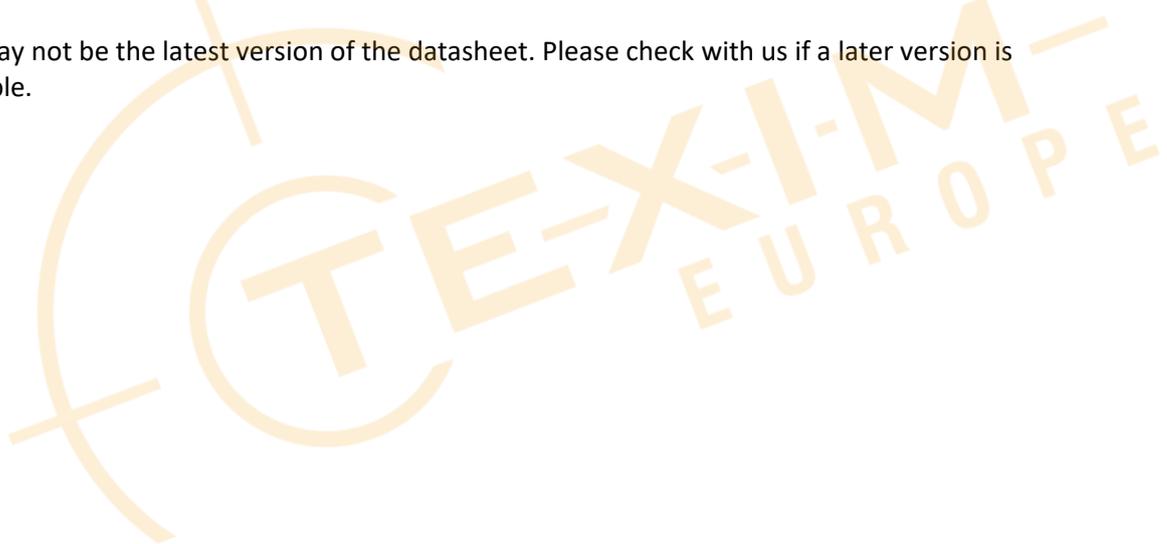



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Søndre Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com